

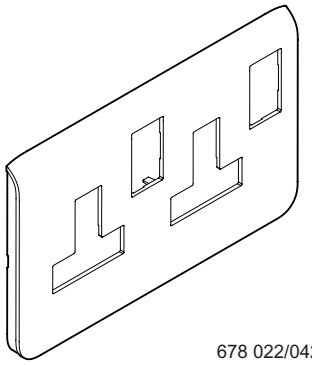
87045 LIMOGES Cedex
Telephone: 33 0 5 55 06 87 87 - Fax: 33 0 5 55 06 88 88

Mosaic™
White and titanium plates for british standard

Cat. No(s).: 678 010/011/012/013/014/015/020/021/022
678 030/031/033/034/035/040/041/042


678 010/030






678 011/031


678 022/042


1. USE

Plates for covering mechanisms.

2. RANGE

	Designation	Finishes		Number of modules	Fixing method	Weight (g)
		White	Titanium			
	1 module plate 1 gang	678 010	678 030	1	with clips	21
	2 modules plate 1 gang	678 011	678 031	2	with clips	18
	3 modules plate 1 gang	678 012	-	3	with clips	15
	2 x 2 modules horizontal plate 2 gang	678 013	678 033	2 x 2	with clips	28
	3 modules plate 2 gang	678 014	678 034	3	with clips	31
	5 modules vertical plate	678 015	678 035	5	with clips	26
	Plate for fused connection unit 1 gang	678 020	678 040	-	with clips	18
	Plate for 13 A switched socket outlet 1 gang	678 021	678 041	-	with clips	19
	Plate for 13 A twin switched socket outlet 2 gang	678 022	678 042	-	with clips	30

3. OVERALL DIMENSIONS

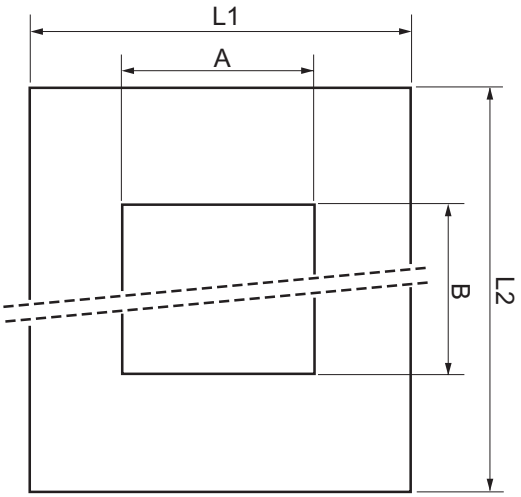

Cat. No.	L1	L2	A	B
678 010/030	88	92	22.7	45.3
678 011/031			45.3	
678 012			67.6	
678 013/033	150		2 x 45.3	
678 014/034			67.6	45.3
678 015/035	88	160	45.3	113.2
678 020/040		92	-	-
678 021/041			-	-
678 022/042	150		-	-

4. MOUNTING

The plates clip on notches onto screw-type mounting supports (notches are used for thickness compensation. E.g.: wall paper). Easy to remove with a screwdriver.
Not flatness defect of more than 1.5 mm, in a periphery of 10 cm around the installed flush box.

5. TECHNICAL CHARACTERISTICS

5.1 Mechanical characteristics
Impact tests: IK 04

5.2 Material characteristics
Front plate: polycarbonate

5.3 Climatic characteristics
Storage temperatures: - 10° C to + 70° C
Operating temperatures: - 5° C to + 50° C

6. CLEANING

Surface cleaning with a cloth.
Do not use: acetone, tar remover, trichloroethylene.

6.1 Resistance to cleaning agents
Hexane (EN 60669-1), methylated spirits, soapy water, glass cleaning substance.

6.2 Resistance to hospital-type cleaning agents
Resistance to the following agents: Anios, Surfanios, Bactilysine, Hydrogen peroxyde (30%).

7. SPECIAL USE

Mosaic plates must not be painted.