
Product sheet

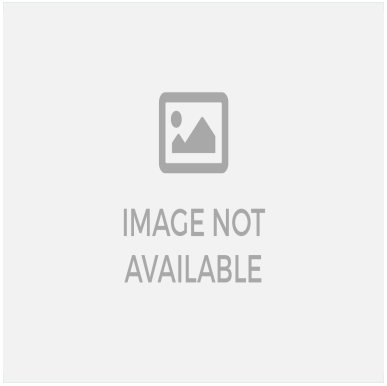

MOSAIC LEGRAND

Mosaic - Spur unit switched neon - Flush-mounted - White - Thermoplastic

REF. 74363 | EAN. 3245060743635

Legrand MOSAIC SPUR UNIT: Flush mount, thermoplastic, halogen-free, IP20, screwed terminal, IK02 impact strength, sleek white finish. Ideal for secure, reliable connections.

> Visit e-catalogue

Description

Legrand MOSAIC SPUR UNIT: Flush mount, thermoplastic, halogen-free, IP20, screwed terminal, IK02 impact strength, sleek white finish. Ideal for secure, reliable connections.

Technical characteristics

Mounting method	Flush-mounted
Connection system	Screwed terminal
Material	Plastic
Material quality	Thermoplastic
Halogen free	Yes
Colour	White
RAL-number (similar)	9003
Suitable for degree of protection (IP)	IP20

Device width	82 mm
Device height	82 mm
Device depth	81 mm
degree of impact strength (IK)	IK02
Operating / setting temperature (Min-Max)	-5-35 °C
Storage temperature (Min-Max)	-10-70 °C
Antimicrobial treatment	No