

Belanko™ S 13A Sockets


Cat. No(s): 6 17X 40/41/42/43/45/46/47/48/49
"X" = Color / finishes




6 17X 40




6 17X 41/42




6 17X 43




6 17X 45



6 17X 46/47/49



6 17X 48



282430-XX

1. USE

One and two gang switched and unswitched 13A socket outlets designed to accept BS 1363 fused plugs.
(Supplied with M3.5 screws for Flush mounting or surface mounting 35mm deep BS boxes.)


2. RANGE

Designation	Cat. No.
1G BS 13A UNSWITCHED SOCKET	6 17X 40
1G BS 13A SP SWTD SOCKET	6 17X 41
1G BS 13A SP SWTD + NEON	6 17X 42
1G BS 13A DP SSO SMALL ROCK	6 17X 43
2G BS 13A UNSWITCHED SOCKET	6 17X 45
2G BS 13A SP SWTD SOCKET	6 17X 46
2G BS 13A SP SWTD+ NEON	6 17X 47
2G BS 13A DP SWTD SOCKET	6 17X 48
2G BS 13A SP RED SWTD + NE	6 17X 49
2G BS 13A SP RED SWTD + NE	6 17X 49
1G BS 13A SOCKET	282430-XX

Colours

-Front: white/anthracite/ivory
-Rear: grey
6 176 XX White
6 177 XX Anthracite
6 178 XX Ivory
282430-C

3. DIMENSIONS (mm)

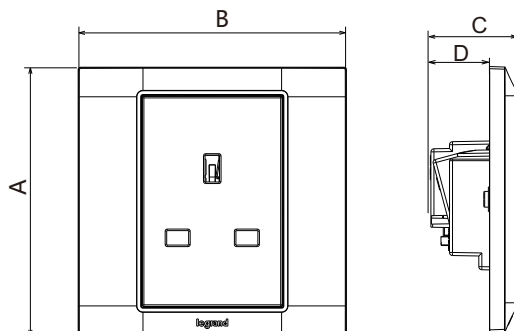

Box depth \geq 35 mm

3. DIMENSIONS (mm)(continued)

References	A	B	C	D
6 17X 40	86	86	28.2	19.2
6 17X 41/42	86	86	33.8	22.1
6 17X 43	86	86	33.8	22.1
6 17X 45	146	86	26	9
6 17X 46/47/49	146	86	34.5	23.3
6 17X 48	146	86	30.4	11.1
282430-XX	146	86	27.9	18.6

4. CONNECTION

Types of terminals: with screws
Terminal capacity: $3 \times 2.5 \text{ mm}^2$
 $3 \times 4 \text{ mm}^2$
 $2 \times 6 \text{ mm}^2$

Recommended stripping length: 12 mm
Recommended screwdriver size: <4 mm flat blade

5. TECHNICAL CHARACTERISTICS

5.1 Material characteristics

Rocker: Polycarbonate
Frame: Polycarbonate
Base: PP
Self-extinguishing:
+ 850° C / 30 s for insulating parts holding live parts in place
+ 650° C / 30 s for other parts made of insulating materials

5.2 Electrical characteristics

Voltage: 250V~
Current: 13A

5.3 Climatic characteristics

Storage temperatures: -10°C to +70°C
Operating temperatures: -5°C to +35°C

5.4 Mechanical characteristics

Impact test: IK04
Protection against solids & liquids: IP20

6. CLEANING

Surface cleaning with a soft, slightly damp cloth.
Do not use: acetone, tar remover, trichloroethylene

7. CONFORMITY - APPROVALS

Conform to BS 1363-2; SS 145-2; MS 589-2.