



CAT6 LOW PROFILE MODULES

Technical information



Features:


- ◆ Low profile modules for faceplates and floor boxes
- ◆ Cat6 compliant performance
- ◆ 568B wiring
- ◆ Top, bottom or rear cable entry
- ◆ 110 or LSA punch down
- ◆ Only 20mm deep
- ◆ Cable strain relief facility
- ◆ Protected labelling facility
- ◆ 25 year Ultima System Warranty

Materials

Fascia	ABS UL94V-HB
RJ45 Jack Contact	Phosphor bronze, nickel plated, finished with 50µ gold plating on plug contact area
IDC Housing	PC+Glass, UL94V-2
IDC Contact	Phosphor bronze, tin plated
Shutter	ABS UL94-HB

Performance

Insertion Force	20N max.
Retention Strength	7.7kg between Jack and Plug
Operating Temperature	-10°C to 60°C
Mating Cycles	750 cycles min.
IDC Wire Range	22-26 AWG stranded or solid wire. Compatible with 110 and LSA punch down tools

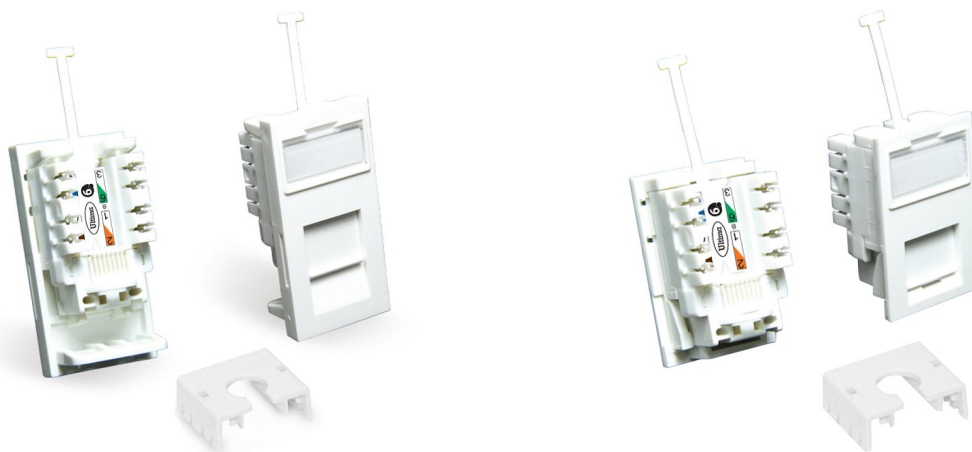

Part Numbers

Item	Description	Type	Style	Colour
779332	Cat6 Module Low Profile	Unshielded	Euro	White
789835	Cat6 Module Low Profile	Unshielded	Euro	Black
779331	Cat6 Module Low Profile	Unshielded	LJ6C	White
789845	Cat6 Module Low Profile	Unshielded	LJ6C	Black