


## Cat 6A Patch Cords

### APPLICATION

Leviton Cat 6A Patch Cords exceed all channel performance requirements in ANSI/TIA-568.2-D from 1 MHz to 500 MHz to support the IEEE 802.3an standard for 10 Gigabit Ethernet over UTP cable. The patch cords provide superior alien crosstalk suppression and protect critical data from EMI (electromagnetic interference) and RFI (radio frequency interference). They are ideal for use in a UTP Cat 6A system, or as part of a Cat 6A shielded system for use in health care, manufacturing, casinos, and other environments where alien crosstalk may be a concern.

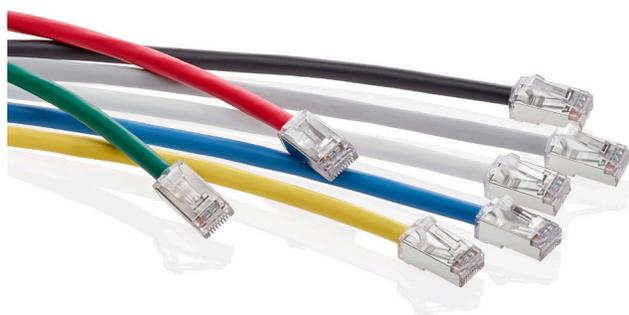

### SPECIFICATION

Patch cords shall meet or exceed electrical transmission performance requirements for all internal and alien crosstalk parameters from 1 to 500 MHz, as described in ANSI/TIA-568.2-D (Cat 6A) and ISO/IEC 11801-1 (Class E<sub>A</sub>) and EN 50173-1 (Class E<sub>A</sub>). The patch cord shall be a 26-gauge FTP construction with stranded conductors to provide greater flex-life. The patch cord will incorporate a plug and boot combination to provide strain relief and ease of use in higher-density applications. The patch cords shall be available in standard lengths of 3, 5, 7, 10, 15, and 20 feet. The patch cord shall be available in seven standard colors. Patch cord plug shall have industry-standard, ANSI/TIA-1096-A compliant 50 micro inches of gold plating.

### COUNTRY OF ORIGIN

USA

### FEATURES

- Tested and verified for Cat 6A component performance
- Cable construction provides excellent alien crosstalk suppression and EMI/RFI protection
- Short boot promotes shorter installed bend radius, ideal for limited depth applications
- Snagless design prevents tab breakage
- Strain-relief ensures long-term network performance
- Outside diameter of .240 inches easier to manage
- 26 AWG stranded conductors for maximum flexibility
- Same cord for UTP or shielded installations
- Manufactured by Leviton using Berk-Tek cable
- Accepts clip-on colored boot markers for network identifications

### STANDARDS COMPLIANCE

- ANSI/TIA-568.2-D Cat 6A
- ISO/IEC 11801-1 Class E<sub>A</sub>
- EN 50173-1 Class E<sub>A</sub>
- cULus listed
- ANSI/TIA-1096-A (formerly FCC Part 68)
- UL 444 CMR rated
- IEEE 802.3bt PoE Type 1 (15.4 Watts) formerly 802.3af, Type 2 (30 Watts) formerly 802.3at, Type 3 (60 Watts), Type 4 (90 Watts)
- Cisco UPoE (60 Watts), UPoE+ (90 Watts)
- Power over HDBaseT™ PoH (95 Watts)
- Maximum cable bundle for 90W and above is 100 cords

### PHYSICAL SPECIFICATIONS

Available Lengths:	See page two
Outer Diameter (O.D.):	0.240"
Materials:	26 AWG, FTP stranded conductor
Colors:	White, yellow, red, blue, green, gray, and black
UL voltage rating:	300V

### WARRANTY INFORMATION


**Note:** Limited Product and Limited Extended Warranties are rendered VOID if the installed structured cabling system is used for PoE applications that exceed the product's specified power rating. For a copy of Leviton product warranties, visit [www.leviton.com/warranty](http://www.leviton.com/warranty).

**PRODUCT SPECIFICATIONS**  
**6AS10-xxx**



**ELECTRONIC FILES**

For CAD files, typical specs, or technical drawings (.DXF, .DWG), visit [www.leviton.com](http://www.leviton.com).

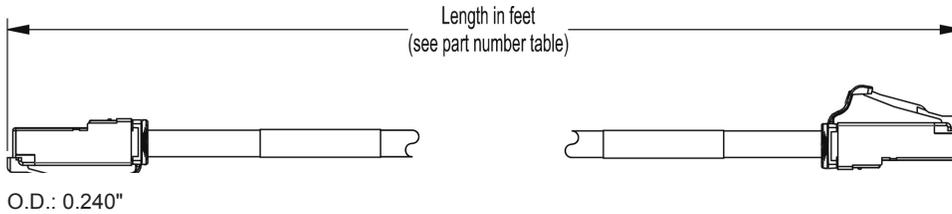

6AS10-xxx

ANSI/TIA-568.2-D Cat 6A PATCH CORD REQUIREMENTS	TIA Minimum Requirements* (dB)		
	@ 100MHz	@ 250MHz	@ 500MHz
1-Meter Patch Cord NEXT	47.0	39.3	28.2
2-Meter Patch Cord NEXT	46.4	38.9	28.4
5-Meter Patch Cord NEXT	45.4	38.1	29.0
Return Loss - All Lengths	18.0	14.0	9.5

1 Meter = 3.280 Feet, 2 Meters = 6.561 Feet, 5 Meters = 16.404 Feet

**\*NOTES:**  
Patch Cords shall meet requirements of all parameters from 1-500 MHz.  
Values in above table are only at specific frequencies and are for reference only.

CAT 6A PATCH CORDS – STOCKED ITEMS							
Description	White	Yellow	Red	Blue	Green	Gray	Black
Cat 6A Patch Cord, 3 feet (0.9 m)	6AS10-03W	6AS10-03Y	6AS10-03R	6AS10-03L	6AS10-03G	6AS10-03S	6AS10-03E
Cat 6A Patch Cord, 5 feet (1.5 m)	6AS10-05W	6AS10-05Y	6AS10-05R	6AS10-05L	6AS10-05G	6AS10-05S	6AS10-05E
Cat 6A Patch Cord, 7 feet (2.1 m)	6AS10-07W	6AS10-07Y	6AS10-07R	6AS10-07L	6AS10-07G	6AS10-07S	6AS10-07E
Cat 6A Patch Cord, 10 feet (3.0 m)	6AS10-10W	6AS10-10Y	6AS10-10R	6AS10-10L	6AS10-10G	6AS10-10S	6AS10-10E
Cat 6A Patch Cord, 15 feet (4.5 m)	6AS10-15W	6AS10-15Y	6AS10-15R	6AS10-15L	6AS10-15G	6AS10-15S	6AS10-15E
Cat 6A Patch Cord, 20 feet (6.0 m)	6AS10-20W	6AS10-20Y	6AS10-20R	6AS10-20L	6AS10-20G	6AS10-20S	6AS10-20E

Note: Other lengths and colors (such as orange and violet) are available by special order, please contact customer service for more information.



For assistance customizing your patch cords, please visit [www.leviton.com/configurator](http://www.leviton.com/configurator) or call Tech Support at 800.824.3005.

For further support information, visit [leviton.com/ns/support](http://leviton.com/ns/support)

**NETWORK SOLUTIONS GLOBAL HEADQUARTERS**  
Bothell, WA, USA | [leviton.com/ns](http://leviton.com/ns)  
(800) 824 3005 / +1 (425) 486 2222 | [appeng@leviton.com](mailto:appeng@leviton.com)

**NETWORK SOLUTIONS EUROPEAN HEADQUARTERS**  
Glenrothes, UK | [leviton.com/ns/emea](http://leviton.com/ns/emea)  
+44 (0) 1592 772124 | [customerserviceeu@leviton.com](mailto:customerserviceeu@leviton.com)

Leviton is dedicated to designing, developing and manufacturing sustainable high-performance structured cabling and speciality cabling solutions. Network Solutions products are available worldwide in over 100 countries. Visit us online to learn more.