
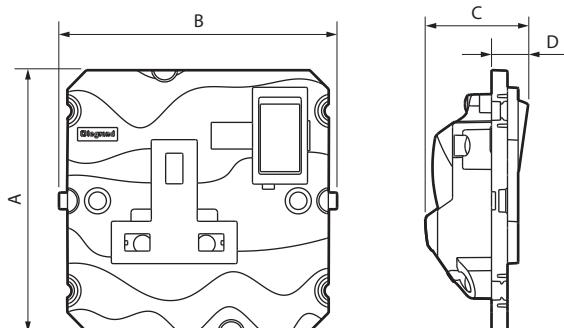


British Standard switched socket outlets 5 A**1. USE**

British standard double pole socket outlets, switched and shuttered. Mechanisms supplied with rocker plates, to be equipped with special plates. Fixing with screws.

2. RANGE**Double pole socket outlets - 2 P+E switched - 1-gang**

5 721 40	White
5 726 40	Magnesium

3. OVERALL DIMENSIONS (mm)

A	B	C	D
78.5	83.5	31	11

4. CONNECTION

Type of terminals : with screws
Terminal capacity: 3 x 4 mm²
Stripping length: 12 mm
Compatible with flexible or rigid cables.

5. TECHNICAL CHARACTERISTICS**■ 5.1 Mechanical characteristics**

Impact tests: IK 04
Penetration by solid bodies/liquids: IP 20

■ 5.2 Material characteristics

Base: PP
Halogen-free

Self-extinguishing:
850°C/30 s for insulating components holding live parts in place.
650°C/30 s for other insulating components.

■ 5.3 Electrical characteristics

Voltage: 250 V~
Current: 5 A
Frequency: 50/60 Hz

■ 6.4 Climate characteristics

Storage temperature: - 10°C to + 70°C
Usage temperature: - 5°C to + 50°C

6. CARE

Clean the surface with a cloth.
Do not use acetone, tar-removing cleaning agents or trichloroethylene.
Resistant to the following products: Hexane (EN 60669-1), methylated spirit, soapy water, diluted ammonia, bleach diluted to 10%, window-cleaning products, pre-impregnated wipes.

Caution: Always test before using special cleaning products.

7. STANDARDS AND APPROVALS

Compliant with installation and manufacturing standards.
See e-catalogue.